


A decorative graphic consisting of several overlapping, wavy bands of blue and cyan, flowing from the top left towards the bottom right, creating a sense of movement and depth.

Fiberlogy

Product Catalogue
2024

TABLE OF CONTENTS

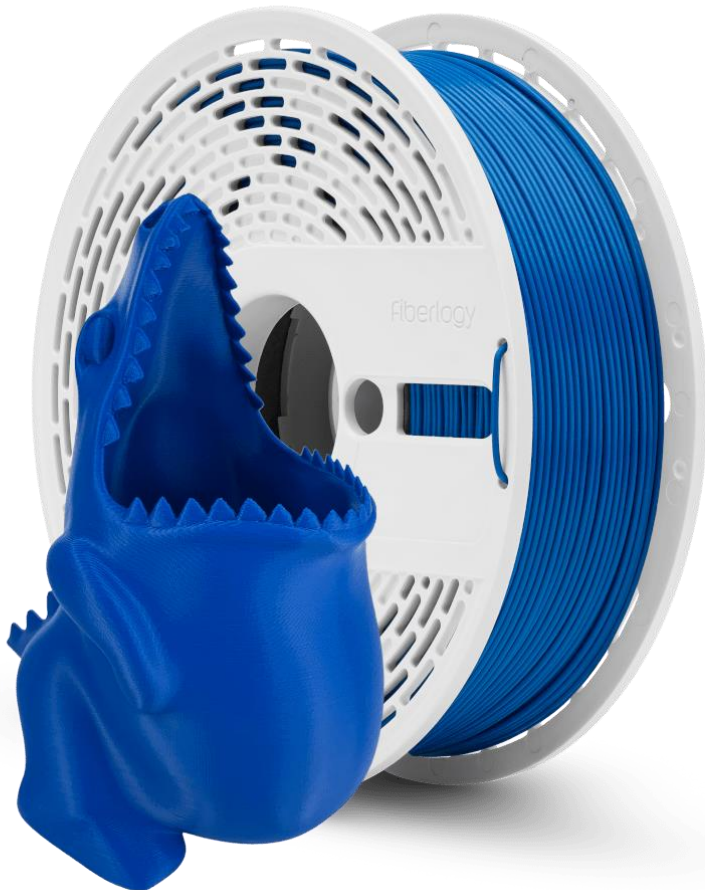

ABS	3	MATTFLEX 40D	23
ABS PLUS	4	NYLON PA12	24
ASA	5	NYLON PA12+CF15	25
BVOH	6	NEW COLORS NYLON PA12+GF15	26
NEW CPE ANTIBAC	7	PC/ABS	27
CPE HT	8	PCTG	28
EASY ABS	9	PCTG+CF	29
NEW COLOR EASY PET-G	10	PCTG+GF	30
NEW COLORS EASY PLA	11	NEW PEI 9085	31
ESD ABS	12	NEW PET-G V0	32
ESD PET-G	13	PLA MINERAL	33
FIBERFLEX 30D	14	PP	34
FIBERFLEX 40D	15	R Series	35
FIBERSATIN	16	REFILL	36
FIBERSILK	17	COLOR INDEX	37
FIBERSMOOTH (PVB)	18	CONTACT	39
FIBERWOOD	19		
HIPS	20		
IMPACT PLA	21		
NEW MATTE PET-G	22		


ABS

ABS is characterized by its hardness and high impact resistance. It is also resistant to high temperatures and abrasion. Prints made using this filament can be further processed mechanically and chemically(with acetone).


The printed elements can serve as concept models for new products or even as their final versions. ABS can also be used in the production of prototype elements which require greater rigidity.

PROPERTIES:

- high hardness
- high impact resistance
- resistance to high temperatures and abrasion
- can be processed mechanically and chemically

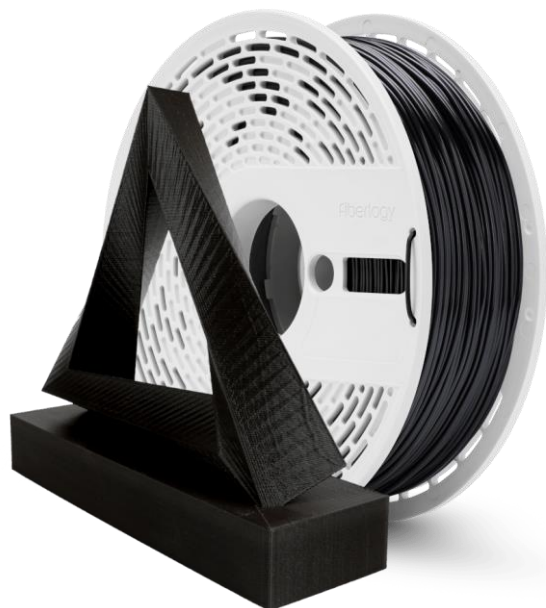

<https://fiberlogy.com>

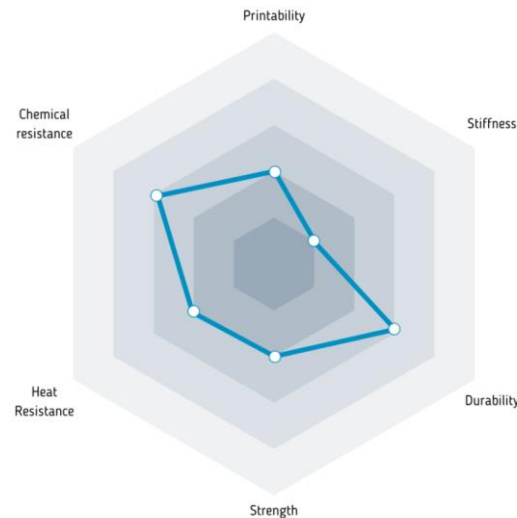

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	250-265°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Beige	✓	
Black	✓	✓
Blue	✓	✓
Burgundy	✓	
Graphite	✓	✓
Gray	✓	✓
Green	✓	
Inox*	✓	
Light Green	✓	✓
Navy Blue	✓	
Onyx*	✓	
Orange	✓	
Red	✓	✓
Vertigo*	✓	
White	✓	✓
Yellow	✓	✓

+48 731 400 201

ABS PLUS

ABS PLUS is a multifunctional material for desktop 3D printing, recommended especially for prototyping models thanks to its special properties such as increased hardness and reduced process shrinkage. What is more, printing will be easier and faster compared to standard

ABS and does not require printing in a closed chamber. It can also be mechanically and chemically processed.


ABS PLUS will find application in the industry, where creating advanced prototypes and end-use parts require increased durability.

PROPERTIES:

- increased hardness and durability
- high impact resistance
- resistance to high temperature and abrasion
- possibility of machining and chemical treatment
- possibility of printing in open printers



<https://fiberlogy.com>

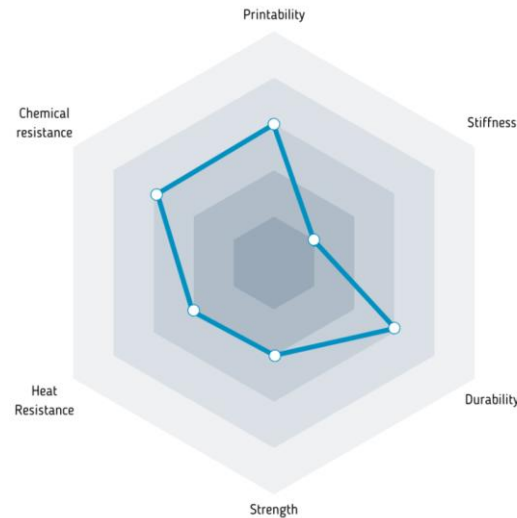

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	250-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Graphite	✓	
Gray	✓	
Red	✓	
White	✓	
Yellow	✓	

office@fiberlogy.com

+48 731 400 201

ASA

Fiberlogy ASA is often referred to as the successor to ABS. Due to its exceptional resistance to UV radiation, high temperatures (up to 94°C) and humidity, it is perfect for printing models exposed to long-term weather conditions. At the same time, the material is very durable and simple to print.


Due to the fact that ASA is characterized by low shrinkage, high adhesion and less emission of unpleasant odours compared to ABS, it can be used in printers that are not fitted with a heated chamber.

PROPERTIES:

- UV resistance
- high durability
- lasting colours
- resistance to temperatures up to 94°C
- can be processed mechanically and chemically
- low odour emission compared to ABS



<https://fiberlogy.com>

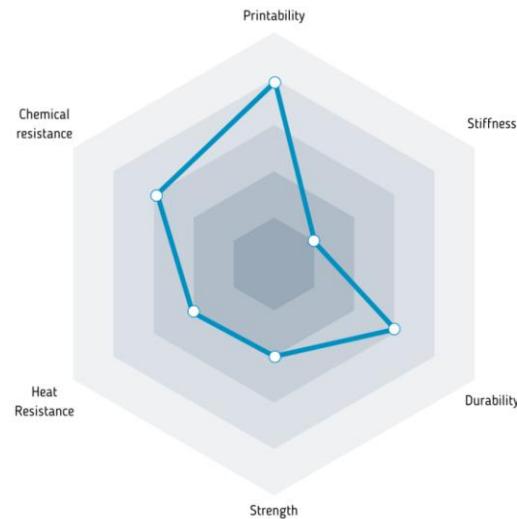

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	255-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Graphite	✓	
Gray	✓	
Inox*	✓	
Light Green	✓	
Natural	✓	
Olive Green	✓	
Onyx*	✓	
Orange	✓	
Red	✓	
Vertigo*	✓	
White	✓	
Yellow	✓	

office@fiberlogy.com

+48 731 400 201

BVOH

This water-soluble BVOH filament allows for printing complex models. The postprocessing involves immersing the print in warm water. As a result, BVOH supports completely disintegrate, revealing the finished model. Waste material can be disposed of in your home sewage system.

The BVOH filament can be used in combination with other popular filaments: PLA, ABS, PET-G, ASA, Nylon, elastic filaments (e.g. TPU), etc.

PROPERTIES:

- soluble in warm water
- high adhesion to PLA, ABS, ASA, PET-G, Nylon, TPU and other filaments
- environmentally friendly – can be disposed of in your home sewage system



PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	190-220°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Natural	✓	

NOTE:

The filament should be stored in a dry place, e.g. in a sealed bag, to avoid moisture and the resulting deterioration of its properties.

NEW

CPE ANTIBAC

CPE ANTIBAC is a specialized 3D printing filament designed to fight against microbes. This copolyester-based filament has high bactericidal properties. Thanks to its resistance to high temperatures (up to 110°C), UV radiation and chemical agents, it is

perfect for sterilization.

The microbiological tests performed show biocidal properties both of the filaments and 3D prints. Research results confirm the effectiveness in reducing the number of bacteria, among others Escherichia coli (by 100%) and Staphylococcus aureus (by 92.4%). In the repeated testing, a result of 100% and 97%, respectively, was obtained.

PROPERTIES:


- eliminates 100% of Escherichia coli bacteria and over 90% of Staphylococcus aureus
- temperature resistance up to 110°
- high mechanical strength
- suitable for sterilization



<https://fiberlogy.com>

Fiberlogy

COLOR	ø1,75	ø2,85
Natural	✓	

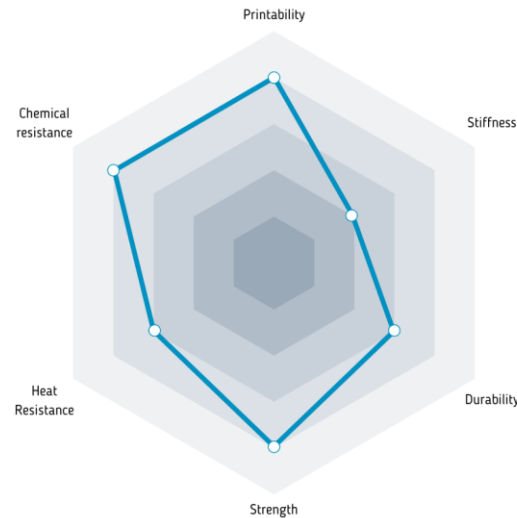

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	260-280°C
Bed temperature:	110-120°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

+48 731 400 201

CPE HT


Fiberlogy CPE HT is made of the latest generation copolyester, commonly used in the production of reusable bottles among other things. It combines high mechanical, chemical and thermal resistance (even up to 110°C).

This filament is odorless and BPA, BPS and styrene free. In the Pure TR version, it can be used to create elements intended for contact with food.

Fiberlogy CPE HT is an alternative to polycarbonate. Having similar strength parameters as PC, it does not share with it the characteristics that make it difficult to use.

PROPERTIES:

- temperature resistance up to 110°C
- no odour
- no BPA, BPS and styrenes
- high mechanical strength
- comparable to the PC

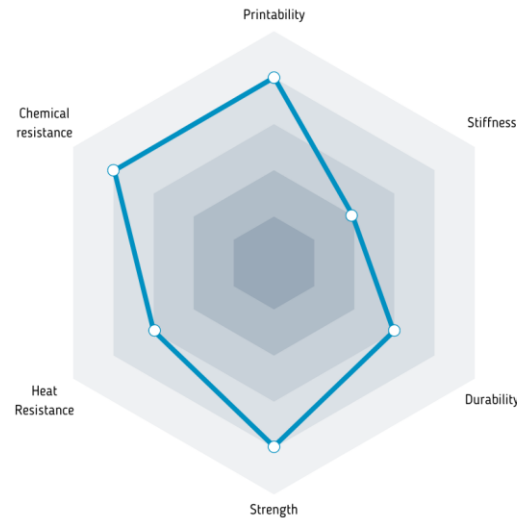

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	260-280°C
Bed temperature:	110-120°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Pure Transparent	✓	



EASY ABS

EASY ABS is an easy-to-use filament that offers the ability to print using open-chamber printers and also allows you to achieve transparent, yet durable prints. The finished printout can be treated with acetone vapors, which will impart a smooth structure to the prints,

hiding any joints between layers.

PROPERTIES:

- easy to print
- does not require a closed chamber
- high impact strength
- available in a transparent version
- can be smoothed in acetone vapors

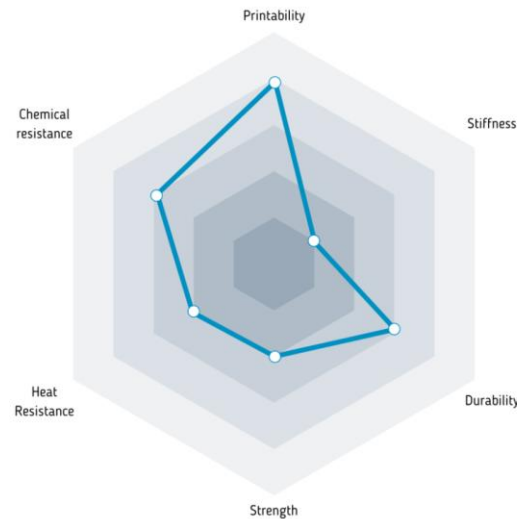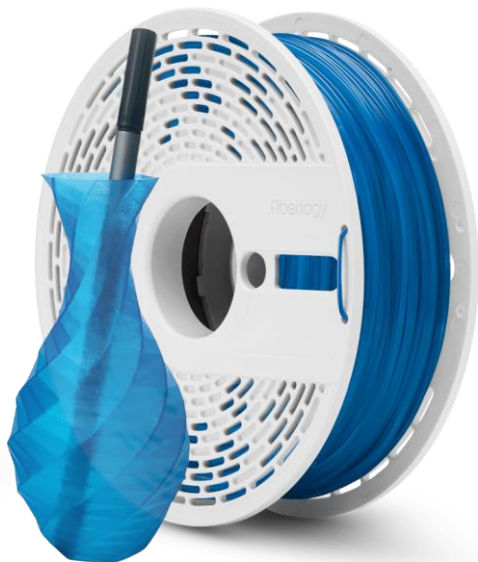

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	235-255°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Blue Transparent	✓	
Burgundy Transparent	✓	
Light Green Transparent	✓	
Navy Blue Transparent	✓	
Orange Transparent	✓	
Pure Transparent	✓	

NEW COLOR

EASY PET-G


EASY PET-G combines the ease of printing with PLA and high strength comparable to that of the traditional PET-G. Printing with EASY PET-G is free from the deficiencies typical of printing with PET-G such as stringing or filament burning. EASY PET-G is available

in opaque and transparent versions. Both forms offer a satisfying final effect in the form of an attractive looking top layer of the printouts.

Fiberlogy EASY PET-G will work great both for printing functional models and decorative elements.

PROPERTIES:

- ease of printing
- high durability
- low susceptibility to shrinkage and flossing
- resistance to acids, salts, alkaline substances
- odorless

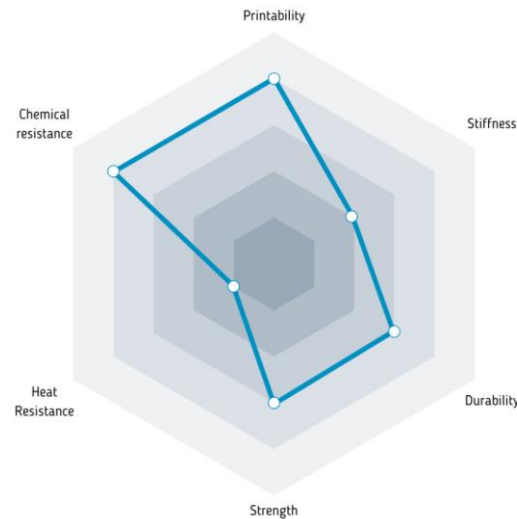

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	220-250°C
Bed temperature:	90°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

Fiberlogy

COLOR	ø1,75	ø2,85
Black	✓	✓
Blue	✓	
Bottle Green TR	✓	
Burgundy Transparent	✓	
Graphite	✓	
Gray	✓	✓
Light Green Transparent	✓	
Navy Blue	✓	
Onyx*	✓	
Orange	✓	✓
Orange Transparent	✓	
Pastel Blue	✓	
Pastel Lilac	✓	
Pastel Mint	✓	
Pastel Pink	✓	
Pastel Yellow	✓	
Pure Transparent	✓	✓
Red	✓	
NEW Scarlet	✓	
Silver*	✓	
Vertigo*	✓	✓
White	✓	✓
Yellow	✓	

NEW COLORS

EASY PLA


hobbyists and professional users.

PROPERTIES:

- easy to print
- biodegradability
- very good adhesion between the print layers



EASY PLA is a basic material for 3D printing. The filament is quite durable. Its properties enable printing very precise and complicated elements. EASY PLA may be used for creating functional prototypes, gadgets, toys and decorations. The ease of printing should satisfy

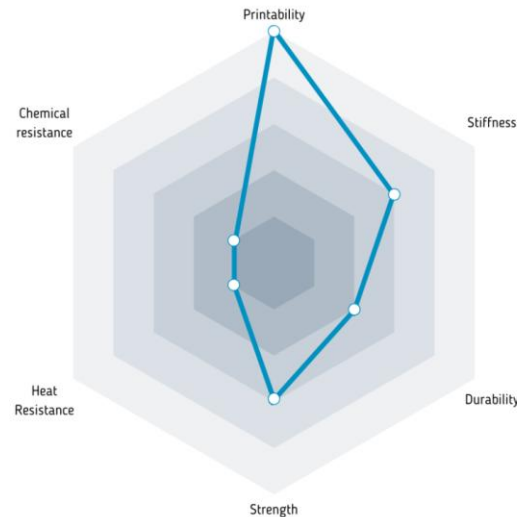

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	200-230°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

NOTE:

- Easy PLA Aurora - recommended minimum 0,5 mm nozzle
- Easy PLA White - due to the dye, the suggested minimum printing temperature is 230°C

Fiberlogy

COLOR	1,75	2,85	COLOR	1,75	2,85
Alien Green*	✓		Orange	✓	✓
Aurora*	✓		Pastel Blue	✓	
Beige	✓	✓	Pastel Lilac	✓	
Black	✓	✓	Pastel Mint	✓	
Blue	✓	✓	Pastel Pink	✓	
N Brick*	✓		Pastel Yellow	✓	
Brown	✓		Pink	✓	
Burgundy	✓	✓	Purple	✓	
N Granite*	✓		Red	✓	✓
Graphite	✓	✓	Red Orange	✓	
Gray	✓	✓	Ruby Red*	✓	
Green	✓		N Sandstone*	✓	
Inox*	✓		Spectra Blue*	✓	
Light Green	✓	✓	True Blue	✓	
Midnight Sky*	✓		True Gold	✓	
Navy Blue	✓	✓	Vertigo*	✓	
Old Gold*	✓		White	✓	✓
Onyx*	✓		Yellow	✓	✓

* - special colors


N - new

ESD ABS

The ESD ABS filament is designed for printing components of electronic devices which are exposed to the risk of damage as a result of electrostatic discharge. High electrical charge dissipative properties ensure the safety of integrated circuits and other electronic components, minimizing the risk of partial or permanent damage. Prints made with ESD ABS guarantee durability and resistance to chemicals, high temperatures and mechanical damage due to the high impact strength characteristic of ABS materials.

PROPERTIES:

- high resistance to electrostatic discharge and chemicals
- high impact strength
- resistance to high temperatures and scratching
- possibility of mechanical and chemical processing

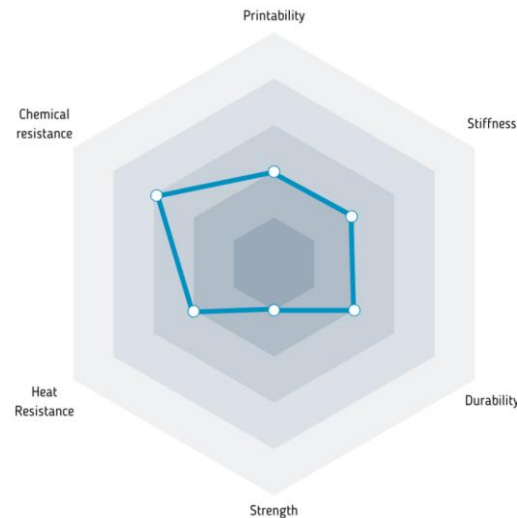

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	250-265°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	

ESD PET-G


The ESD filament is designed for printing components of electronic devices which are exposed to the risk of damage as a result of electrostatic discharge. High electrical charge dissipative properties ensure the safety of integrated circuits and other electronic

components, minimizing the risk of partial or permanent damage.

ESD PET-G is characterized by high strength and resistance to weak acids, alcohols, oils and gasoline. This material does not require a heated chamber or a hardened nozzle.

PROPERTIES:

- high resistance to electrostatic discharge
- mechanically strong and resistant to chemicals
- easy to print - does not require a heated chamber
- low moisture absorption

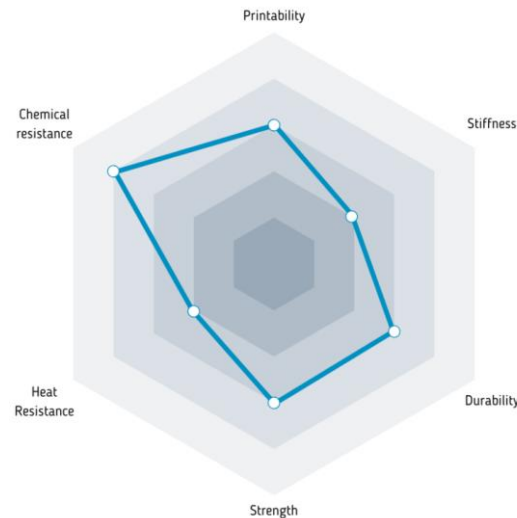

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	250-265°C
Bed temperature:	85°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	

NOTE:

Due to the content of carbon nanoparticles, the minimum recommended nozzle diameter is 0.5 mm.

FIBERFLEX 30D

A thermoplastic material and another option for enthusiast of printing on rubber-like materials. It is characterized by reduced hardness up to 30D on the Shore scale, very good flexibility and higher impact strength.


The material is recommended especially for printing tires, seals, belts and all kinds of elastic elements.

PROPERTIES:

- 30D Shore hardness
- high impact resistance in low temperatures
- very good thermal, chemical and abrasion resistance



<https://fiberlogy.com>

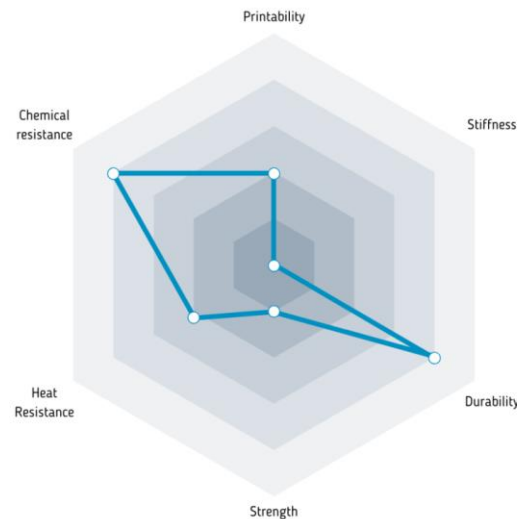

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	200-220°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,05 mm
Oval tolerance:	+ 0,03 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Beige	✓	
Black	✓	
Blue	✓	
Graphite	✓	
Gray	✓	
Light Green	✓	
Orange	✓	
Pink	✓	
Red	✓	
White	✓	
Yellow	✓	


+48 731 400 201

FIBERFLEX 40D

A thermoplastic elastomer with a hardness of 40D in Shore scale, which may be printed at the speeds up to 45 mm/s. The rubbery-like material can be extended up to 680% of its original dimensions. Moreover, it has a high impact resistance at low temperatures and is resistant to abrasion and has a very good chemical resistance. All material properties give opportunity to use it in places that require frequent bending, in gadgets as well as rubber parts of machines and joining elements.

PROPERTIES:

- 40D Shore hardness
- high impact resistance in low temperatures
- very good thermal, chemical and abrasion resistance

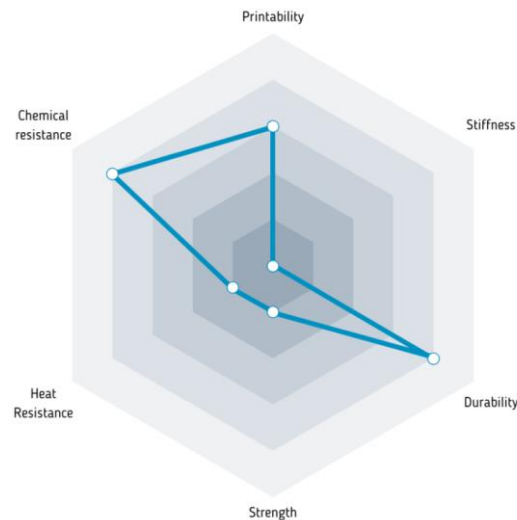

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	200-220°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,05 mm
Oval tolerance:	+ 0,03 mm

COLOR	ø1,75	ø2,85
Beige	✓	
Black	✓	✓
Blue	✓	
Brown	✓	
Burgundy	✓	
Graphite	✓	
Gray	✓	
Green	✓	
Light Green	✓	
Navy Blue	✓	
Orange	✓	✓
Pink	✓	✓
Purple	✓	
Red	✓	✓
Vertigo*	✓	
White	✓	✓
Yellow	✓	✓

FIBERSATIN



FiberSatin is the newest filament from Fiberlogy. Thanks to a semi-matt, satin finish, it provides for an unusual appearance of the model. It effectively reduces the visibility of layers, providing a uniform print surface.

The filament is perfect for creating models with high aesthetic values, both as a hobby and in creating ready-made small-series products.

FiberSatin successfully prints with the typical PLA settings (e.g. Fiberlogy Easy PLA).

PROPERTIES:

- semi-matt finish with a subtle gloss
- perfect hiding of layers
- rough texture
- easy to print like PLA

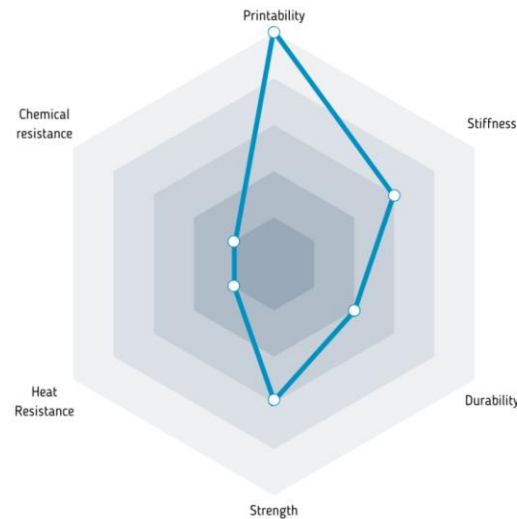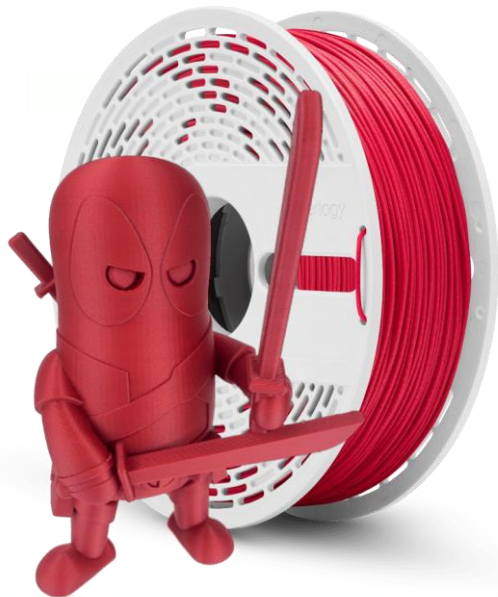

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	200-230°C
Bed temperature:	50°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Green	✓	
Pearl	✓	
Pink	✓	
Red	✓	

NOTE:

Due to the strong adhesion, damage to the bed surface (eg PEI) may occur. We recommend printing on a tape.

FIBERSILK

FiberSilk provides a unique depth effect of the 3D model. Prints created with it are characterized by an intense metallic shine. The richness of colours, deep gloss, high durability and ease of printing make it one of the favourite filaments of every 3D printing enthusiast.


This filament is recommended for the production of various decorative elements such as vases, figurines, cosplay accessories, etc.

PROPERTIES:

- shiny, metallic finish with a color depth effect
- good adhesion and low visibility of layer boundaries
- high strength and impact strength
- easy to print



<https://fiberlogy.com>

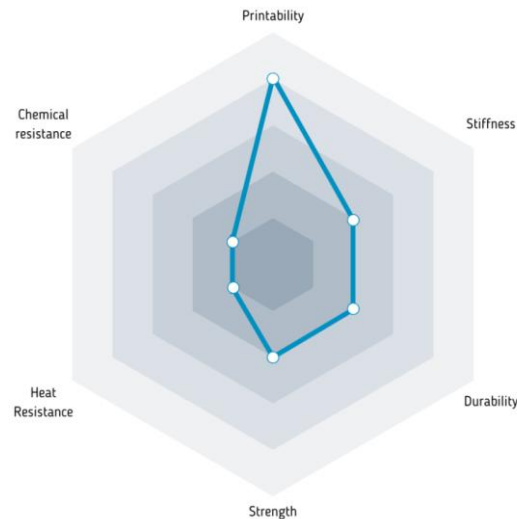

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	210-230°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Anthracite	✓	
Blue	✓	
Brass	✓	
Bronze	✓	
Burgundy	✓	
Copper	✓	
Green	✓	
Gold	✓	
Inox	✓	
Light Green	✓	
Navy Blue	✓	
Orange	✓	
Pearl	✓	
Pink	✓	
Red	✓	
Silver	✓	
Turquoise	✓	
Yellow	✓	

NOTE:

Due to the strong adhesion, damage to the bed surface (eg PEI) may occur. We recommend printing on a tape.

+48 731 400 201

FIBERSMOOTH


FiberSmooth is a material based on polyvinyl butyral (PVB). Its solubility in contact with isopropyl alcohol (IPA) makes it easy to smooth. That makes it easy to get a model with perfect-smooth walls without visible boundaries between the

layers. In printing, FiberSmooth is as easy as PLA, which means that it can be successfully used even by novice 3D printing users.

This filament is perfect for printing decorative elements such as vases, figurines and sculptures, jewelry elements, lamps.

PROPERTIES:

- ease of printing
- possibility of smoothing with isopropyl alcohol (IPA)
- low shrinkage
- odorless

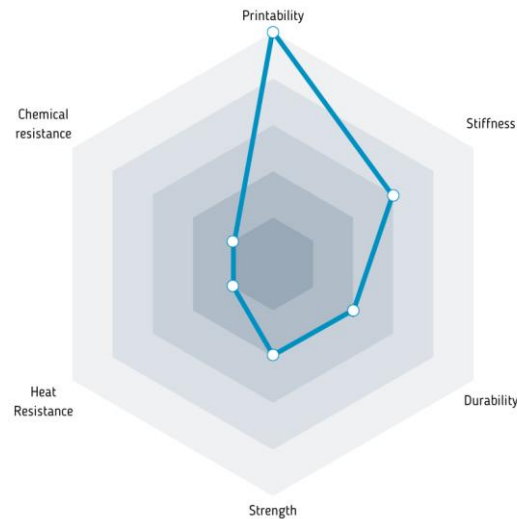

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	215-225°C
Bed temperature:	75°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Gray	✓	
Graphite	✓	
NEW Pure	✓	
Red	✓	

FIBERWOOD

Wood-like material which, thanks to less fragile enables better feeding of filament to the extruder. The resulting parts can be machined, painted, varnished and colored, giving you even more opportunities to use this filament. Appearance of printing enables to


use it in art and modeling studios.

PROPERTIES:

- easy feeding of filament to the extruder
– the material does not break
- possibility of grinding, polishing, varnishing and colouring the prints



<https://fiberlogy.com>

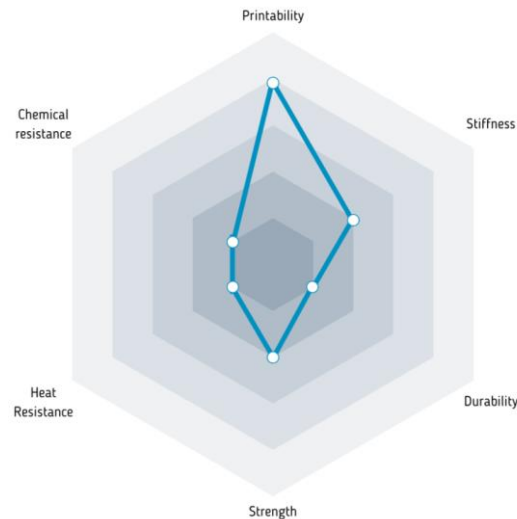

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	200-220°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Black	✓	
Brown	✓	
Carmine	✓	
Green	✓	
Natural	✓	✓
White	✓	

NOTE:

- To avoid a situation where the nozzle gets clogged with wood particles, we recommend cleaning the extruder after each FiberWood print by using any type of PLA filament.
- Recommended minimum 0,5 mm nozzle


+48 731 400 201

HIPS

HIPS can be used as basic material for printing or as a support for other types of filaments. Accuracy and lighter weight of printing enable to use it in modeling, creating miniatures and parts of costumes. The possibility of dissolving of this filament allows it to be used as support material for highly complex printing and subsequent rinsing it out from proper printing.

PROPERTIES:

- lighter than other materials
- matt surface
- soluble in D-limonene
- can be polished, glued and covered with acrylic paint

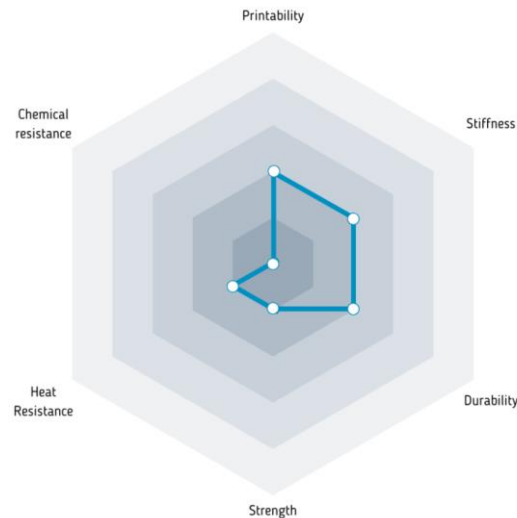

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	230-245°C
Bed temperature:	80-100°C
Chamber temperature:	80°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm


COLOR	ø1,75	ø2,85
Black	✓	
Graphite	✓	
Natural	✓	
White	✓	

IMPACT PLA

IMPACT PLA is a technical filament with increased impact strength. Its parameters exceeding even the ABS. While keeping the ease and security of the printing process typical of traditional PLA, IMPACT PLA is ideal for creating demanding prints working in extreme conditions while maintaining the highest level of attention to detail.

PROPERTIES:

- increased impact strength compared to PLA (up to 800%) and ABS (up to 50%)
- parameters exceeding the ABS
- precise reproduction of details
- very good adhesion

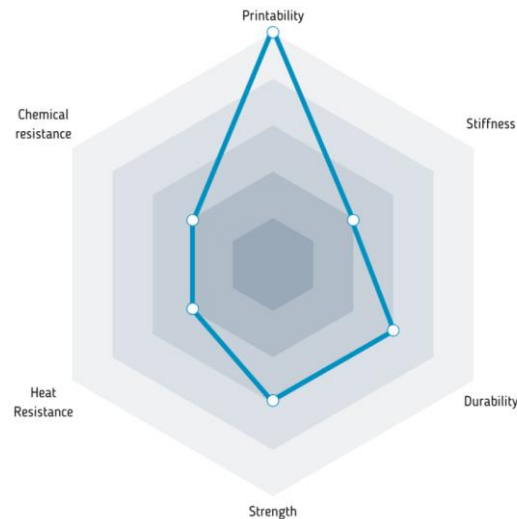

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	220-245°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Army Green	✓	
Black	✓	
Blue	✓	
Graphite	✓	
Gray	✓	
Khaki	✓	
Light Green	✓	
Olive Green	✓	
Orange	✓	
Onyx*	✓	
Red	✓	
Vertigo*	✓	
White	✓	
Yellow	✓	

NEW


MATTE PET-G

Matte PET-G filament is a new product in the Fiberology offer. It's the answer to numerous requests from 3D printing enthusiasts. This modern PET-G filament is characterized by unique, matte finish. It not only gives prints a refined look, but also effectively masks the layers, enhancing the esthetics of the final product.

Compared to matte PLA filaments, Matte PET-G offers much higher strength. As a result, it allows for creating solid and durable prints with an elegant appearance. It is perfect for designs where esthetics is as important as the strength of the filament.

PROPERTIES:

- matte finish
- ease to print
- low susceptibility to shrinkage and stringing
- resistance to acids, salts, alkaline substances
- excellent hiding of the layer lines

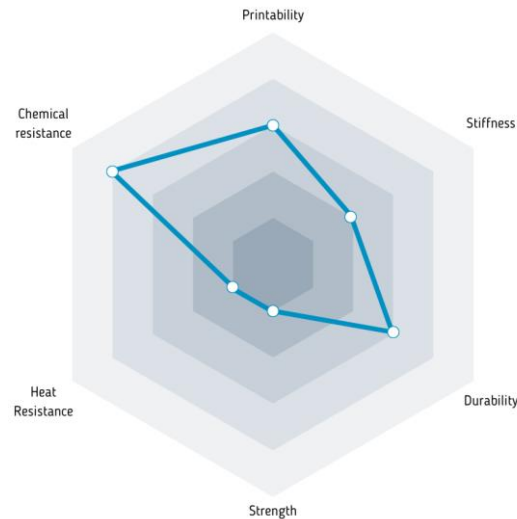

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	260-280°C
Bed temperature:	90°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

Fiberology

COLOR	ø1,75	ø2,85
NEW Black	✓	
NEW Blue	✓	
NEW Graphite	✓	
NEW Gray	✓	
NEW Red	✓	
NEW White	✓	

MATTFLEX 40D

MATTFLEX 40D is a flexible filament that stands out from other rubber-like filaments due to its matte finish, which perfectly hides layer boundaries and gives the model a unique look. The ability to stretch up to 6 times and 50% compression combined with high impact strength, chemical and temperature resistance make it a very versatile material for many applications.

Fiberlogy MATTFLEX 40D is ideal for printing models exposed to frequent impacts, bending or twisting.


Fiberlogy MATTFLEX 40D is ideal for printing models exposed to frequent impacts, bending or twisting.

PROPERTIES:

- matte finish and low visibility of layers
- 40D Shore hardness
- very good thermal, chemical and abrasion resistance
- printing speed up to 60 mm/s



<https://fiberlogy.com>

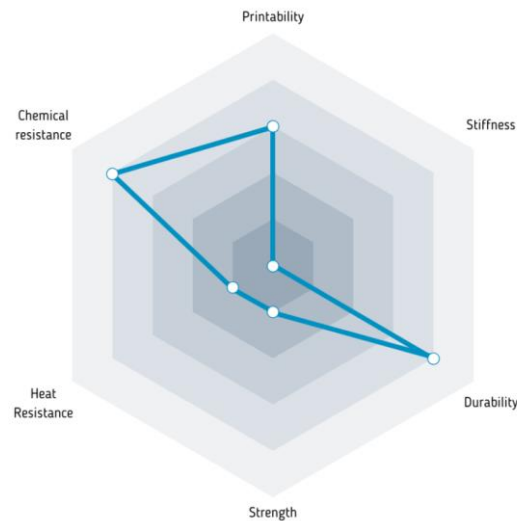

PRODUCT DATA	
Net weight:	0,85 kg (30 oz)
Print temperature:	210-230°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,05 mm
Oval tolerance:	+ 0,03 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Graphite	✓	
Red	✓	
White	✓	

+48 731 400 201

NYLON PA12


Thanks to its resistance to high temperatures, alcohol and chemicals, Nylon is particularly useful for mechanical and technical applications. It is extremely durable, strong and unbreakable. It is easily machined with tools designed for metal processing and it is

also easily painted, which makes it even more versatile and functional.

It is incredibly flexible - it expands by 50% before it breaks. However, it is not resistant to concentrated alkalis and acids.

PROPERTIES:

- high resistance to high temperatures and chemical compounds
- high flexibility
- resistant to abrasion

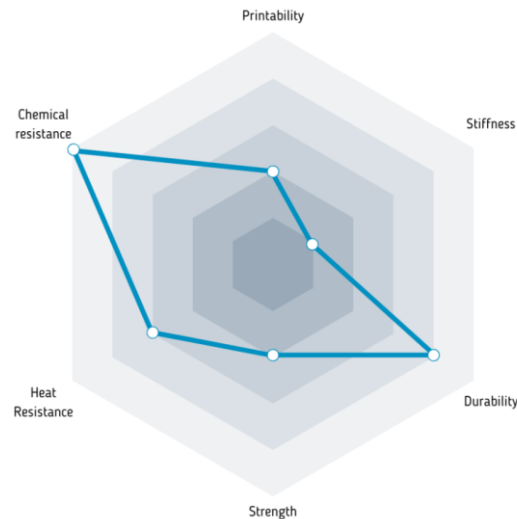

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	255-270°C
Bed temperature:	100°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Inox*	✓	
Light Green	✓	
Natural	✓	
Orange	✓	
Red	✓	
White	✓	
Yellow	✓	

NYLON PA12+CF15


PA12+CF is yet another manifestation of the technical capabilities of filament PA12 which has been reinforced with 15% addition of carbon fibers. It is characterized by high thermal resistance and

less shrinkage compared to the unmodified Nylon PA12. The application of carbon fiber allows for a reduction of weight of the component while maintaining its high structural stiffness.

PA12+CF has a range of applications across the industry, including the automotive and the engineering sectors, lending itself to the creation of advanced prototypes, drones and final products which require increased durability while reducing their weight.

PROPERTIES :

- twice the tensile strength of PA12
- more than twice the stiffness of PA12
- higher thermal resistance compared to unmodified PA12 (up to 160°C)
- high chemical resistance

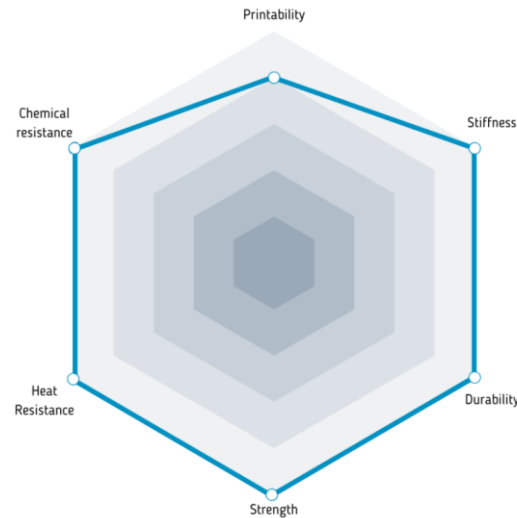

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	255-270°C
Bed temperature:	100°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	✓

NOTE:

The material has highly abrasive properties. We recommend the use of hardened steel or ruby nozzles.

NEW COLORS

NYLON PA12+GF15

PA12 + GF15 is another product (after PA12 + CF) that is an extension of the Nylon offer from Fiberlogy. The addition of glass fibers allowed to obtain a filament combining high durability and


impact resistance and resistance to temperatures and chemicals at the same time.

Low susceptibility to shrinkage and high dimensional stability make the Fiberlogy PA12 + CF15 filament suitable for use in printers not equipped with a heated chamber.

PA12 + GF15 filament offers greater flexibility than Nylon with carbon fibers, making it ideal for applications that work under variable loads and are exposed to impact.

PROPERTIES :

- perfect combination of high durability and impact resistance
- dimensional stability
- resistance to heat (up to 170°C) and chemicals
- resistance to material fatigue
- the possibility to print on an open printer

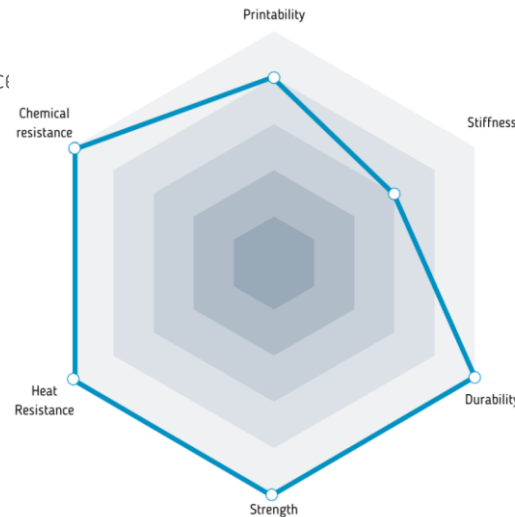

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	255-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
NEW Light Green	✓	
Natural	✓	
NEW Red	✓	

NOTE:

The material has highly abrasive properties. We recommend the use of hardened steel or ruby nozzles.

PC/ABS

Our blend of polycarbonate (PC) and ABS provides excellent mechanical properties over a very wide temperature range. The combination of these components creates a filament characterized by exceptional impact strength, especially at low temperatures, and a high HDT value. This allows the material to be used at temperatures up to 110 °C.


PC/ABS filament is an excellent choice for many applications, especially where mechanical strength, exceptional impact strength and thermal resistance are required.

PROPERTIES:

- high durability
- high impact strength, also at low temperatures
- low shrinkage
- thermal resistance
- easy to print



<https://fiberlogy.com>

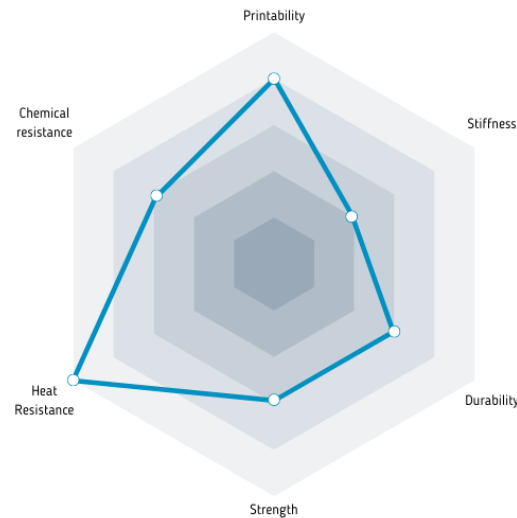

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	230-250°C
Bed temperature:	80-100°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Natural	✓	

+48 731 400 201

PCTG


Fiberlogy PCTG is an excellent alternative for people looking for a filament with PET-G properties, but with increased impact strength. Belonging to the same family of polyesters as PET-G, PCTG is characterized by similar strength and ease of printing as its more popular counterpart, however, thanks to its higher impact resistance, it can be successfully used where ordinary PET-G could not do.

A typical feature of PCTG is its high transparency in the transparent version and resistance to temperatures up to 76°C.

This filament in the Pure TR version can be used for the production of products approved for contact with food.

PROPERTIES:

- high impact strength (up to 20 times greater than PET-G)
- high chemical resistance
- high optical transparency
- easy to print – dimensional stability and low shrinkage
- suitable for contact with food – BPA free

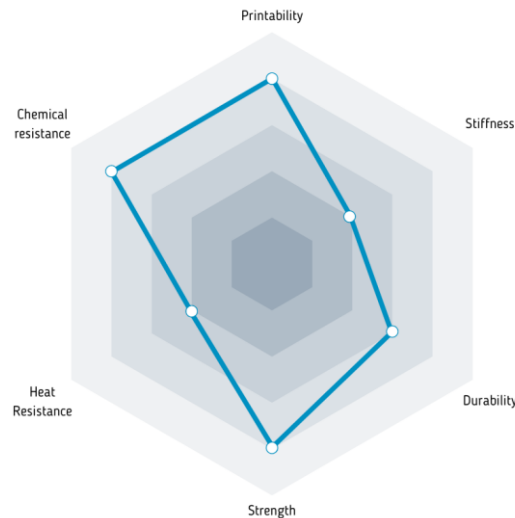

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	250-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm


COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Burgundy Transparent	✓	
Graphite	✓	
Gray	✓	
Inox*	✓	
Light Green Transparent	✓	
Navy Blue Transparent	✓	
Onyx*	✓	
Orange	✓	
Orange Transparent	✓	
Pure Transparent	✓	
Red	✓	
Vertigo*	✓	
White	✓	

PCTG+CF

PCTG+CF filament is a revolutionary combination of the versatility of PCTG and unique properties of carbon fiber (CF). The well-known PCTG filament has been enriched with 10% of carbon. This way, the material is much more stiff. Additionally, greater tensile strength in comparison with pure PCTG makes this filament a good choice for designs requiring increased strength. For engineers and designers who need a material which combines efficiency and technical excellence, PCTG+CF filament is the answer to these requirements, which paves the way for new possibilities in 3D printing.

PROPERTIES:

- great stiffness and tensile strength
- chemical and heat resistance
- carbon finish which hides the layers perfectly
- low shrinkage and ability to use in almost any 3D printer
- easy mechanical post processing of the print

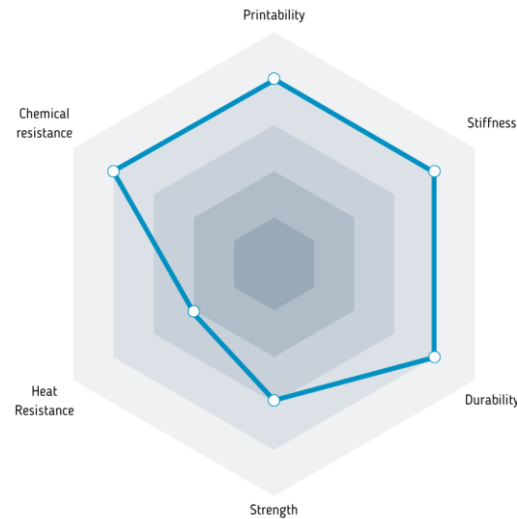

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	250-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	


PCTG+GF

PCTG+GF filament is our latest product for 3D printing enthusiasts, combining the strength and versatility of modern copolyester with the unique properties of glass fiber. It is a technical filament with high impact strength, ideal for advanced projects where typical polymers are not enough.

Glass fiber adds unique capabilities to the filament, creating a product with higher strength and stiffness, while remaining resistant to external conditions and chemicals. The properties of the filament make it ideal for printing machine parts, tools or outdoor applications.

PROPERTIES:

- high impact and tensile strength
- chemical and thermal resistance
- a matte finish that makes it easy to hide layers
- low shrinkage and the ability to print on open printers

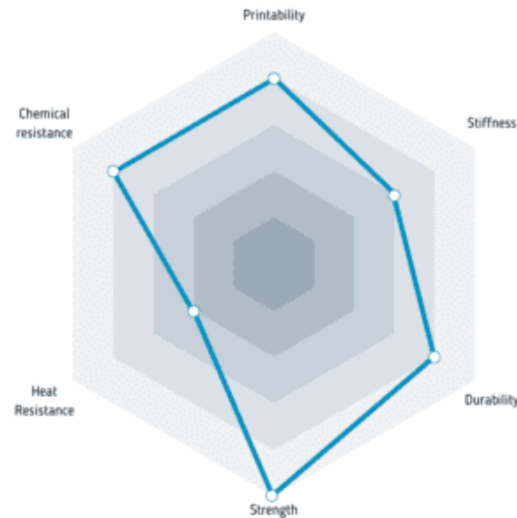

PRODUCT DATA

Net weight:	0,75 kg (26 oz)
Print temperature:	250-270°C
Bed temperature:	90-110°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Natural		✓

NEW

PEI 9085


PEI 9085 (made of ULTEMTM 9085 resin) is a material with an exceptional strength. It is used on a daily basis in the most demanding sectors, such as aviation, rail transport and automotive industry. Thanks to its unique properties, such as incombustibility (UL 94 V0) and non-toxicity, it is valued and approved by aircraft manufacturers (FAR 25.853) and rail industry (EN 45545). Components made of ULTEMTM resin are effective substitutes for metal elements, combining the resistance of steel and the lightness of aluminum. This makes it possible to reduce the time and expenses connected to development and manufacturing fully functional parts.

PROPERTIES:

- abrasion resistance
- resistance to temperatures exceeding 190°C and UV radiation
- incombustible and low smoke emission
- high mechanical strength
- chemical resistance
- low shrinkage



<https://fiberlogy.com>

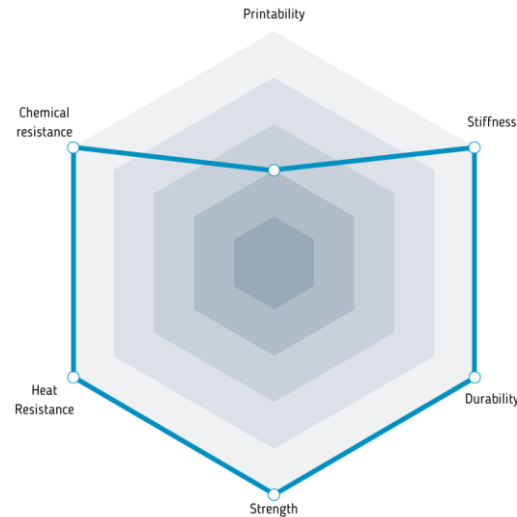

PRODUCT DATA

Net weight:	0,5 kg (15 oz)
Print temperature:	350-380°C
Bed temperature:	160°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

office@fiberlogy.com

Fiberlogy

COLOR	ø1,75	ø2,85
Natural	✓	

+48 731 400 201

NEW

PET-G V0


PET-G V0 expands the range of FDM/FFF printing materials in Fiberlogy's portfolio. It is part of the FR (Flame Retardant) family filaments. It's characterized by non-flammability in accordance with the UL94 V0 standard*. Both the filament and prints made from it are not susceptible to direct flame.

On contact, PET-G V0 self-extinguishes in less than 10 seconds. That's why it is ideal for the production of electronics housings or mechanical components of vehicles and machinery.

*Filament is not certified by Underwriters Laboratories and does not have a UL number.

PROPERTIES:

- non-flammable – safe in contact with fire
- halogen-free – does not emit harmful fumes and odors
- high chemical resistance
- low susceptibility to shrinkage
- easy to print

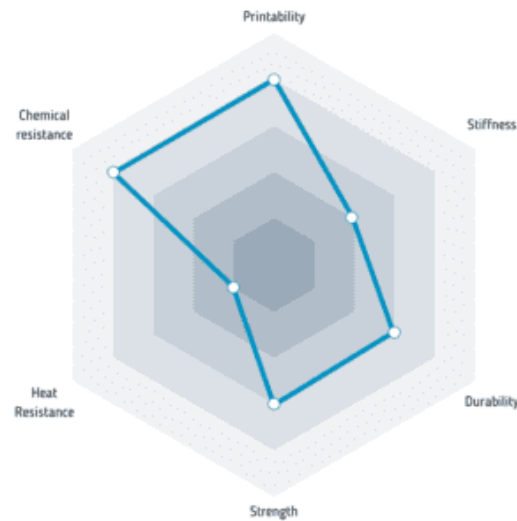

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	220-250°C
Bed temperature:	90°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

Fiberlogy

COLOR	ø1,75	ø2,85
Black	✓	
Gray	✓	
Natural	✓	


PLA MINERAL

figures of non-standard shapes.

Filament, which enables to create prints similar to plaster casts. This specific feature, combined with the precision of printing allows you to use it in the architectural and art studios, detailed prototyping and modeling. You can print mock-ups, as well as

PROPERTIES:

- satin surface thanks to the addition of chalk
- very good printing precision

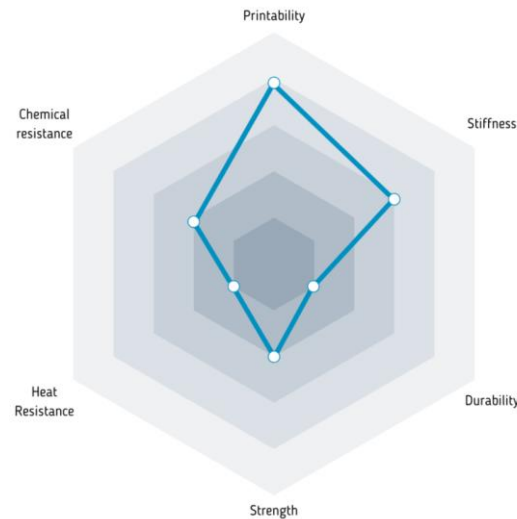

PRODUCT DATA

Net weight:	0,85 kg (30 oz)
Print temperature:	190-210°C
Bed temperature:	50-70°C
Diameter tolerance:	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm

COLOR	ø1,75	ø2,85
Black	✓	
Concrete	✓	
Marble	✓	
Natural	✓	✓
White	✓	✓

PP (Polypropylene)

Fiberlogy PP filament creates the possibility of 3D printing with the second most used polymer in the world. Due to its high resistance to damage and remarkable flexibility as well as resistance to chemical

substances (acids, bases, water), it has found many applications in various fields of industry and everyday use.


Fiberlogy PP can be printed with almost any 3D printer without the need for a closed chamber.

PROPERTIES:

- non-toxic and odorless
- high resistance to chemicals
- resistance to mechanical damage
- very good adhesion between the print layers



<https://fiberlogy.com>

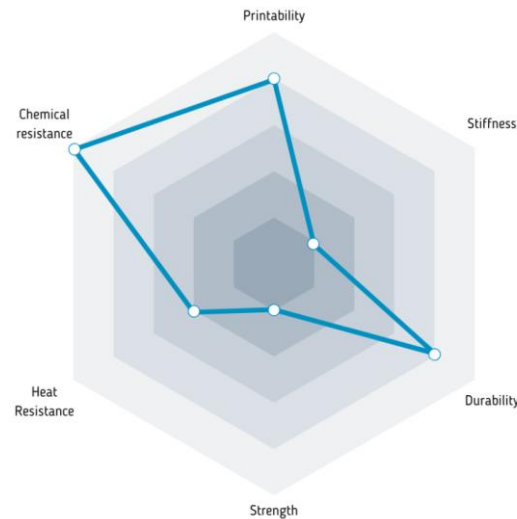

PRODUCT DATA

Net weight:	0.75 kg (26 oz)
Print temperature:	220-250°C
Bed temperature:	not required
Diameter tolerance:	+/- 0.02 mm
Oval tolerance:	+ 0.01 mm

office@fiberlogy.com

COLOR	ø1,75	ø2,85
Black	✓	
Blue	✓	
Graphite	✓	
Gray	✓	
Light Green	✓	
Natural	✓	
Orange	✓	
Red	✓	
White	✓	
Yellow	✓	

NOTE:

For adhesion to the table, the use of office tape is recommended

+48 731 400 201

R Series

Fiberlogy R Series is a filament created 100% in the recycling process. It is obtained from raw material derived from carefully selected and verified sources. Thanks to this, it is a great choice for all fans of ecological 3D printing. With its parameters, the R series represents the highest quality, not inferior to its traditional counterparts. All filaments from the R series are available only in anthracite color.

PROPERTIES:

- produced entirely in the recycling process
- the same characteristics as the conventional counterparts
- attractive price



<https://fiberlogy.com>

COLOR	ø1,75	ø2,85
R ABS	✓	
R NYLON	✓	
R PET-G	✓	
R PLA*	✓	
R PP	✓	

*Recommended minimum 0,5 mm nozzle



PRODUCT DATA	R ABS	R NYLON	R PET-G	R PLA	R PP
Net weight:	0.75 kg (26 oz)	0.75 kg (26 oz)	0.85 kg (30 oz)	0.85 kg (30 oz)	0,75 kg (26 oz)
Print temperature:	250-265°C	255-270°C	220-250°C	210-230°C	220-250°C
Bed temperature:	90-110°C	100°C	90°C	50-70°C	not required
Diameter tolerance:	+/- 0.02 mm				
Oval tolerance:	+ 0.01 mm				

office@fiberlogy.com

+48 731 400 201

REFILL

REFILL is a non-spool cartridge compatible with the reusable spool MASTERSPOOL standard, which anyone can print by themselves using the RichRap's free and all-available project.

This solution is more ecological and slightly cheaper in comparison to the filaments offered on disposable spools. Fiberlogy is one of the first few companies in the world that has decided to add the solution to its range.

PROPERTIES:

- compatibility with the MasterSpool project
- no spool - less waste
- guaranteed quality of Fiberlogy
- lower price



COLOR	ABS	EASY PET-G	EASY PLA	R ABS	R PET-G	R PLA	PCTG
	ø1,75						
Anthracite				✓	✓	✓	
Black	✓	✓	✓				✓
Blue			✓				
Burgundy TR		✓					
Graphite	✓	✓	✓				✓
Gray	✓	✓	✓				
Inox*			✓				
Light Green			✓				
Light Green TR		✓					
Orange			✓				
Orange TR		✓					
Pure TR		✓					✓
Silver*		✓					
Vertigo*		✓	✓				
White	✓	✓	✓				✓

PRODUCT DATA	ABS	EASY PET-G	EASY PLA	R ABS	R PET-G	R PLA	PCTG
Net weight:	0,85 kg	0,85 kg	0,85 kg	0,75 kg	0,85 kg	0,85 kg	0,75 kg
Print temperature:	250-265°C	220-250°C	200-230°C	250-265°C	220-230°C	210-230°C	250-270°C
Bed temperature:	90-110°C	90°C	50-70°C	90-110°C	90°C	50-70°C	90-110°C
Diameter tolerance:	+/- 0,02 mm	+/- 0,02 mm	+/- 0,02 mm	+/- 0,02 mm	+/- 0,02 mm	+/- 0,02 mm	+/- 0,02 mm
Oval tolerance:	+ 0,01 mm	+ 0,01 mm	+ 0,01 mm	+ 0,01 mm	+ 0,01 mm	+ 0,01 mm	+ 0,01 mm

COLOR INDEX

	BASIC					
	 Anthracite	 Army Green	 Beige	 Black	 Blue	 Brown
	 Burgundy	 Carmine	 Concrete	 Graphite	 Gray	 Green
	 Khaki	 Light Green	 Marble	 Navy Blue	 Olive Green	 Orange
	 Pink	 Purple	 Red	 Red Orange	 Scarlet	 True Blue
	 White	 Yellow	 Natural - depends on the raw material			
	SPECIAL					
	 Alien Green	 Aurora	 Brick	 Inox	 Granite	 Midnight Sky
	 Old Gold	 Onyx	 Ruby Red	 Silver	 Sandstone	 Spectra Blue
	 True Gold	 Vertigo				

COLOR INDEX

FIBERSILK	 Anthracite	 Blue	 Brass	 Bronze	 Burgundy	 Copper
	 Gold	 Green	 Inox	 Light Green	 Navy Blue	 Orange
	 Pearl	 Pink	 Red	 Silver	 Turquoise	 Yellow
TRANSPARENT	 Blue	 Bottle Green	 Burgundy			
	 Light Green	 Navy Blue	 Orange			
	 Pure					
PASTEL			 Blue	 Lilac		
			 Mint	 Pink		
			 Yellow			

ABOUT FIBERLOGY

Fiberlogy was established in Poland and this is where it operates. We are proud to be part of an international technological revolution. A modern production line and the knowledge of our technologists allow us to offer filaments of unique properties and parameters for FFF/FDM printers.

We have many years of experience in plastics processing and profile extrusion. Our dedication to testing new materials and new production possibilities allows us to achieve amazing results. We provide our customers with filaments of unique characteristics. Our materials have outstanding properties and parameters - diameter tolerance of +/- 0.02mm and oval tolerance of +0.01mm.

CONTACT

Fiberlab S.A.
Brzezie 387
32-014 Brzezie
VAT EU: PL6772384498